

750-GDU

HOT FOOD VISUAL MERCHANDISER



Customer side



Pass-through model
with optional casters
Control side

- HALO HEAT . . . a controlled, uniform heat source that gently surrounds and holds food to provide a better appearance, taste, and longer holding life.
- Lighted display maximizes visual merchandising which promotes impulse sales.
- Holds and displays foods hot and fresh for hours.
- Non-magnetic stainless steel interior resists corrosion.
- Available in two designs:
 - Reach-in cabinet with angled shelves for maximum food visibility.
 - Pass-through cabinet for self-service applications.
- Adjustable thermostat and temperature gauge to monitor inside air temperature.
- Separate ON/OFF switch for interior lighting.
- Holds full or half size sheet pans.
- Low energy usage.

Lighted holding cabinet with 20 gauge non-magnetic stainless steel exterior, tempered glass French doors on the control side, and a solid glass panel on the non-control side. The cabinet is controlled by one (1) ON/OFF adjustable thermostat, 60° to 200°F (16° to 93°C); includes one (1) indicator light; and one (1) holding temperature gauge to monitor inside air temperature. The interior of the cabinet is lit by two (2) 40 watt appliance bulbs controlled by an ON/OFF switch. The cabinet is furnished with three (3) chrome plated wire shelves, and two (2) chromed side racks spaced at 3" (76mm) centers. Side racks and wire shelves are canted at a 10° angle for maximum visibility of product.


- MODEL 750-GDU:** French doors with solid glass panel on non-control side and three wire shelves at a 10-degree angle.

- MODEL 750-GDU/PT:** Pass-through design with French doors on both sides and straight shelves.



ADDITIONAL FEATURES & OPTIONS

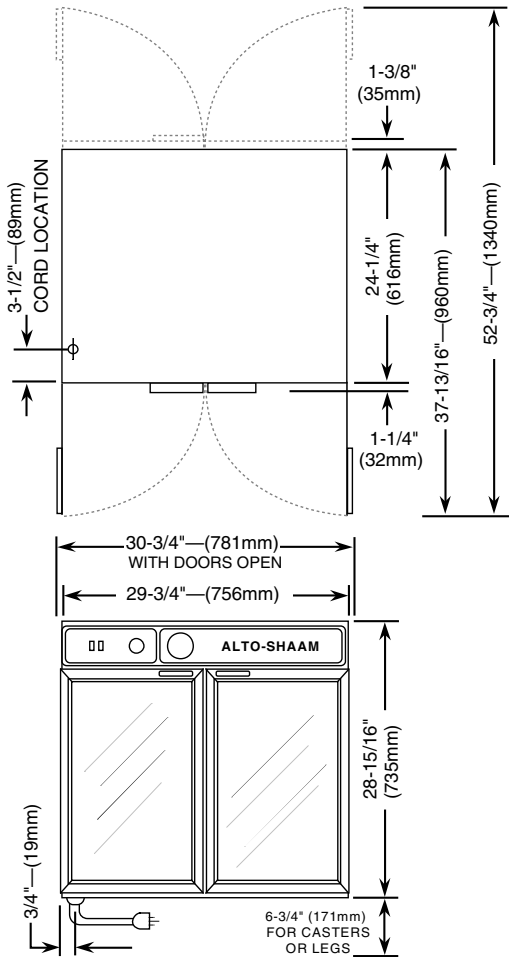

- Straight side racks and wire shelves can be ordered.
 - Specify on order as required.
- Temperature display in Fahrenheit is standard.
 - ➔ Specify degrees Celsius on order as required.



DIMENSIONS: H x W x D
REACH-IN EXTERIOR: 28-5/16" x 29-3/4" x 25-1/2" (735mm x 756mm x 648mm)
REACH-IN INTERIOR PER COMPARTMENT: 20-7/8" x 26-7/8" x 21" (530mm x 683mm x 533mm)
PASS-THROUGH EXTERIOR: 28-5/16" x 29-3/4" x 26-7/8" (735mm x 756mm x 683mm)
PASS-THROUGH INTERIOR PER COMPARTMENT: 20-7/8" x 26-7/8" x 21-5/8" (530mm x 683mm x 549mm)

ELECTRICAL						
	VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG INCLUDED
125	at 125	1	50/60	19.2	2.3	 NEMA L5-30P 30A-125V PLUG
230	at 230	1	50/60	9.1	2.1	 CEE-7/7 220-230V PLUG

PRODUCT \ PAN CAPACITY	
36 lbs (16 kg) MAXIMUM	
FULL-SIZE SHEET PANS: Six (6) 18" x 26" x 1" (457mm x 660mm x 254mm)	
HALF-SIZE SHEET PANS: Six (6) 18" x 13" x 1" (457mm x 330mm x 254mm)	
— up to twelve (12) with additional wire shelves	
— Two (2) side racks spaced at 3" (76mm) centers	
— Three (3) chrome plated wire shelves	
— Two (2) 40 watt appliance lamps	

INSTALLATION REQUIREMENTS
Cabinet must be installed level and not in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions. In order to maintain NSF standards, counter models must be sealed at bottom by NSF approved sealant or equipped with casters or 6" (152mm) legs.
CLEARANCE REQUIREMENTS
3-inches (76mm) at the back, 2-inches (51mm) at the top, and 1-inch (25mm) at both sides

WEIGHT	750-GDU	750-GDU/PT
NET	135 lb est. (61 kg)	135 lb est. (61 kg)
SHIP	155 lb (70 kg)	155 lb (70 kg)
CARTON DIMENSIONS:	31" x 34" x 28"	
(H x W x D)	(787mm x 864mm x 711mm)	
	DOMESTIC SHIPMENTS ONLY	

OPTIONS & ACCESSORIES	
<input type="checkbox"/> Casters, 5" (127mm)	4007
<input type="checkbox"/> Legs, 6" (152mm)	5205
<input type="checkbox"/> Stacking Hardware	14209

<input type="checkbox"/> Wire Pan Grid	PN-2115
<input type="checkbox"/> 18" x 26" Sheet Pan Insert	
Wire Shelves	
<input type="checkbox"/> Reach-in	SH-2851
<input type="checkbox"/> Pass-through	SH-2114