



MILK COOLER STORAGE



PROJECT:

 ITEM NUMBER:

 MODEL NUMBER:

MILK COOLER STORAGE

SPECIFICATIONS FOR: GR422

- Exterior finish: Exterior front, back, sides, top and doors are white baked on enamel. All exterior joints and seams fold in without lap joints. No exposed raw edges.
- Interior finish: The interior liner and door panel are 22 gauge galvanized steel.
- Insulation: The cabinet shell is insulated with 2-1/2 inches of fiberglass. The doors are foamed-in-place with polyurethane insulation.
- Hardware: Heavy duty, edge mounted pivot hinges, chrome plated pull handles with key locks and self adjusting magnetic gaskets.
- Electrical: Top mounted air cooled condensing unit and interior mounted evaporator are standard. The evaporator is copper tube, aluminum fin. Refrigerant flow is controlled by a thermostatic expansion valve increasing the ability of the refrigerator to meet varying load conditions. 1/4 HP condensing unit. Operating temperature: 38°F.
- Instrumentation: 115/60/1. Cord and plug furnished.
- Refrigeration: Holds 28 cases of milk. 42 cubic feet of storage in only 15 square feet of floor space.
- Approvals: UL and C-UL listed** UL Sanitation listed***

STANDARD FEATURES

- Air cooled condensing unit
- Automatic defrost
- Exterior doors (2)
- Galvanized steel interior
- Hanging thermometer
- Key locks
- Interior shelving
- Magnetic gasketing
- Operating temperature: 38°F
- Power cord and plug furnished
- Stocked for same day shipment
- White baked on enamel exterior
- UL, C-UL** & UL Sanitation*** listed
- Warranties: 18 months labor plus 1 year parts



OPTIONAL FEATURES*

- Casters
- Condensate vaporizer with drain line kit
- Legs
- Warranties: 5 year compressor



Nor-Lake, Inc.
 Registered to ISO 9001:2000
 File No. A3204

* Most options are available two weeks from receipt of order. Please contact us for specific questions.
 **C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.
 ***UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

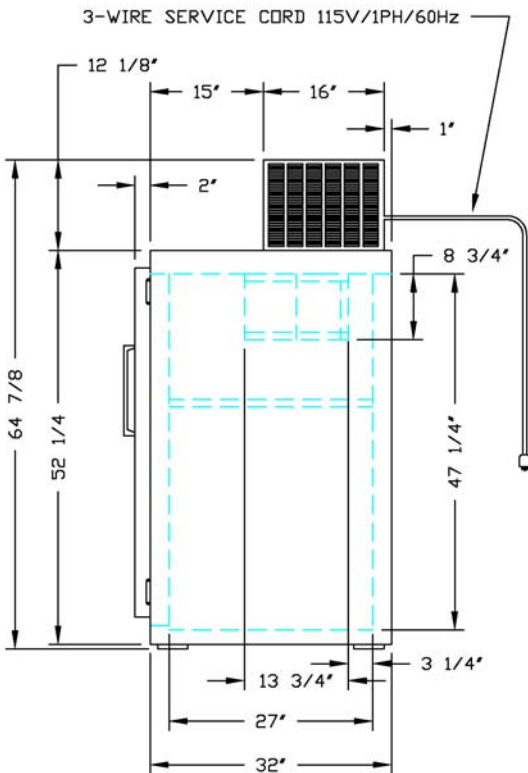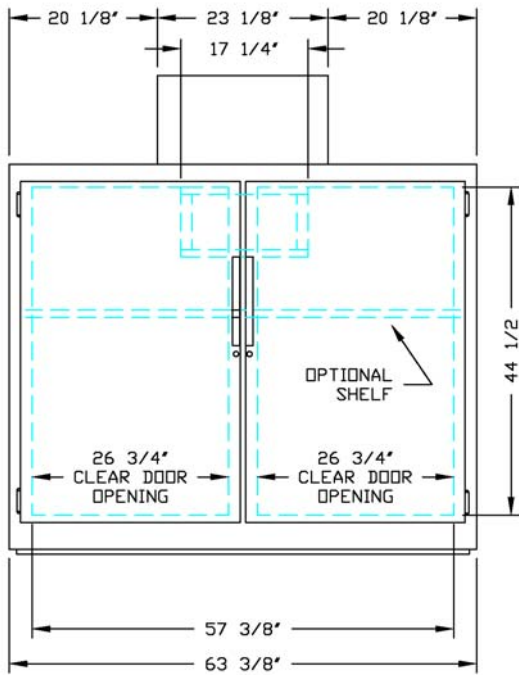

SPECIFICATIONS

GR422

<i>Crated Height</i>	70"
<i>Crated Width</i>	69-1/2"
<i>Crated Depth</i>	39-1/2"
<i>Crated Weight (lbs)</i>	597
<i>Interior Height</i>	47-1/4"
<i>Interior Width</i>	57-3/8"
<i>Interior Depth</i>	27"
<i>Overall Height (Including Refrig.)</i>	64-7/8"
<i>Overall Width</i>	63-3/8"
<i>Overall Depth (Including Doors)</i>	34"
<i>Gross Cubage (ft.³)</i>	42
<i>Compressor Size</i>	1/4
<i>Refrigerant</i>	R-134A
<i>Electrical Characteristics</i>	115/60/1
<i>Cord & Plug Furnished</i>	Yes
<i>Maximum Fuse Size</i>	15
<i>NEMA Plug Configuration</i>	5-15P
<i>Total Amp Draw</i>	6.4

Specifications subject to change without notice.



Revision Date: 10/05
 © 2005 NOR-LAKE, INC.
 Printed in the U.S.A.
 Part Number: 089718

